

MODIFICATION RECOMMENDED

N1922A-01

S E R V I C E N O T E

Supersedes:
NONE

Agilent P-Series Wideband Power Sensors

Serial Numbers: US00000001 / US999999999

Loose bulkhead (N1920-60005)

To Be Performed By: Agilent-Qualified Personnel

Parts Required:

| P/N | Description | Qty. |
|------|-------------|------|
| NONE | | |

ADMINISTRATIVE INFORMATION

| | | | |
|--|---|--|---|
| SERVICE NOTE CLASSIFICATION: | | | |
| MODIFICATION RECOMMENDED | | | |
| ACTION CATEGORY: | <input type="checkbox"/> IMMEDIATELY <input checked="" type="checkbox"/> ON SPECIFIED FAILURE <input type="checkbox"/> AGREEABLE TIME | STANDARDS: LABOR: 0.4 Hours | |
| LOCATION CATEGORY: | <input type="checkbox"/> CUSTOMER INSTALLABLE <input type="checkbox"/> ON-SITE <input checked="" type="checkbox"/> SERVICE CENTER | SERVICE INVENTORY: <input type="checkbox"/> RETURN <input type="checkbox"/> SCRAP <input checked="" type="checkbox"/> SEE TEXT | USED PARTS: <input type="checkbox"/> RETURN <input type="checkbox"/> SCRAP <input checked="" type="checkbox"/> SEE TEXT |
| AVAILABILITY: | PRODUCT'S SUPPORT LIFE | | |
| AGILENT RESPONSIBLE UNTIL: Always | | | |
| AUTHOR: CH PRODUCT LINE: WC | | | |
| ADDITIONAL INFORMATION: | | | |

© AGILENT TECHNOLOGIES, INC. 2007
PRINTED IN U.S.A.



April 13, 2007

Situation:

Loose bulkhead (p/n: N1920-60005) for P-series wideband power sensor built in US. Kindly send it to local service center for rework.

Solution/Action:


1. Screw lock nut 85025-20003 onto threaded end of bulkhead assembly. Apply loctite (0427-0231) on the first, second and third threads of the end of the bulkhead (as shown in the figure below):



2. Torque lock nut to 28 in. -lbs. with T-314592.



T-314592

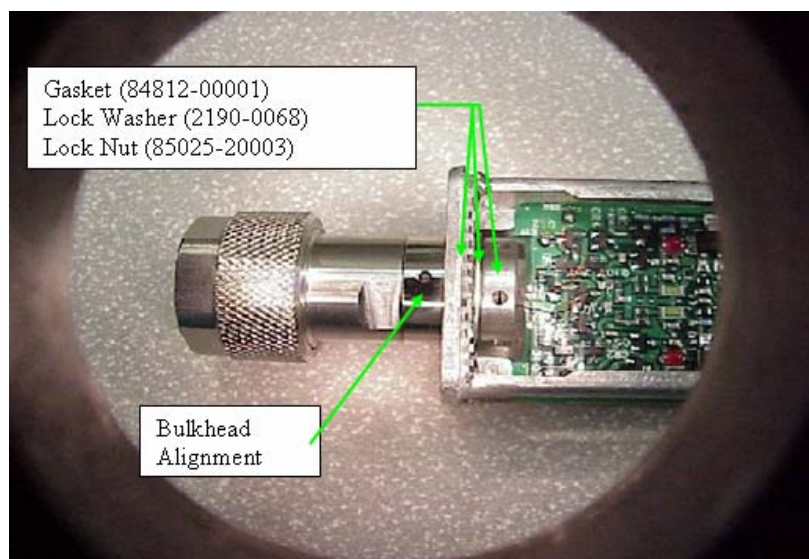

3. Calibrate the unit after the above changes are applied.