

Errata

Document Title: 5370B Universal Time Interval Counter Product Note 5370B-3

Part Number: 5952-7769

Revision Date: January 1985

HP References in this Application Note

This application note may contain references to HP or Hewlett-Packard. Please note that Hewlett-Packard's former test and measurement, semiconductor products and chemical analysis businesses are now part of Agilent Technologies. We have made no changes to this application note copy. The HP XXXX referred to in this document is now the Agilent XXXX. For example, model number HP8648A is now model number Agilent 8648A.

About this Application Note

We've added this application note to the Agilent website in an effort to help you support your product. This manual provides the best information we could find. It may be incomplete or contain dated information, and the scan quality may not be ideal. If we find a better copy in the future, we will add it to the Agilent website.


Support for Your Product

Agilent no longer sells or supports this product. You will find any other available product information on the Agilent website:

www.agilent.com

Search for the model number of this product, and the resulting product page will guide you to any available information. Our service centers may be able to perform calibration if no repair parts are needed, but no other support from Agilent is available.

High Throughput Picosecond Characterization of Pulse Parameters

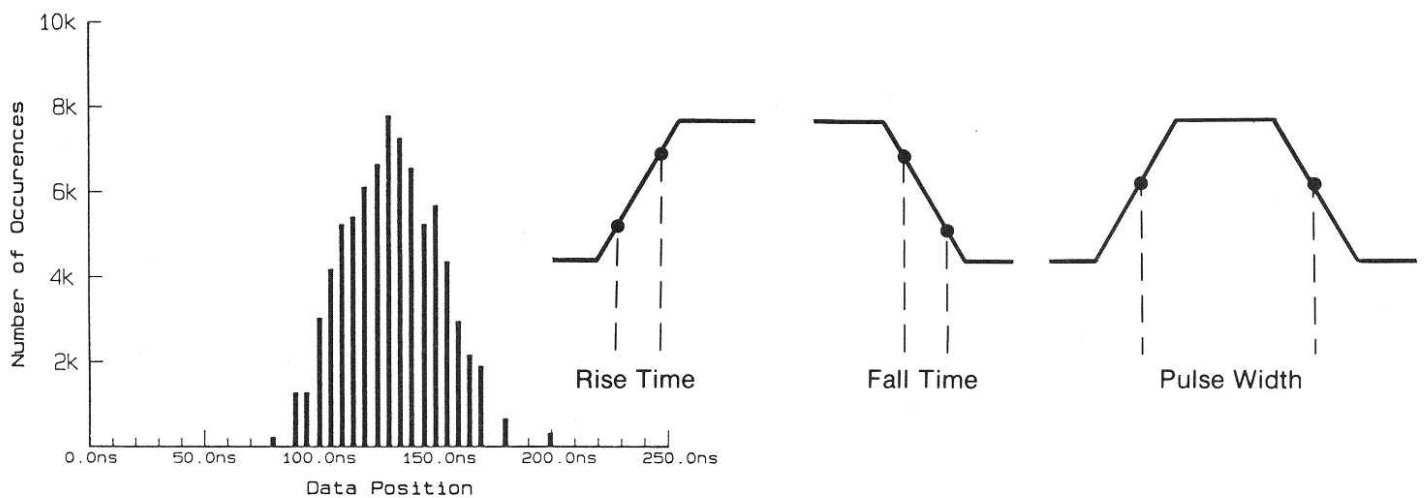

**5370B UNIVERSAL TIME
INTERVAL COUNTER**

**Product Note
5370B-3**



Contents

	Page
Introduction	2
Applications	3
The effects of instrument bandwidth on rise and fall time measurements	6
Counter or oscilloscope to characterize pulse parameters	7
A sample program	8
Operation	24
Explanation of softkeys	25
Miscellaneous	26
Conclusion	27

Introduction

A counter is particularly effective either when single shot events are measured, or when the time required to make a measurement is critical – such as in the production environment. This product note will show the use of a computer-controlled time interval counter to characterize pulse parameters with picosecond resolution. In addition, some powerful statistical routines will be presented to further enhance the characterization.

Obviously with this capability, the statistical nature of pulse parameters can be quickly analyzed. For example, drift of rise time with time or some external influence – such as temperature or voltage – can be rapidly characterized. Similarly, pulse width jitter statistics can be analyzed in seconds.

The 5370B Counter

The counter used here is the 5370B Time Interval Counter. This counter can measure single events such as rise time, fall time and pulse width to a typical resolution of 20 picoseconds rms, and can make successive measurements with only 165 μ seconds delay between each measurement (approximately 6000 readings per second). (See 5370B data sheet for more details.)

The 5363B Probes

Used in these sample programs are the 5363B Time Interval Probes. Often necessary in time interval measurements, these probes provide high impedance, low capacitance connections to the device under test, thus minimizing loading effects. The probes also extend the voltage range over which trigger levels can be set with precision. (See 5363B data sheet for more details.)

The Series 200 Computer

The series 200 computers are powerful machines for scientific and engineering applications and are well suited for instrument control activities.

Many programming languages can be used. In this product note, the program is written in BASIC. For time critical functions, (such as the bin sorting for the histogram routine), some parts can be written in Pascal, subsequently compiled and then called by the BASIC program as CSUB's. (For more details refer to the appropriate Series 200 computer documentation.)

The program listed here will run on a 9816A, 9826A or 9836A with at least 250 kilobytes of program memory, BASIC 2.0 and Extensions 2.1. Graph2 _1 and the 9836C allow the graphs to be plotted in color.

Applications

There are many application areas where the following techniques can be extremely valuable. Examples are:

- **Integrated Circuit Test System Timing Calibration**
- **Integrated Circuit Characterization**
- **Magnetic Disc Drive and Media Testing**
- **Digital Communications Systems Timing Analysis**
- **Pulse Generator Characterization**

The predominant requirements are:

- **The need to measure times with picosecond resolution**
- **The need to measure single shot or infrequently repetitive events**
- **The need for high measurement throughput such as in the production test environment**
- **The need to analyze the statistics of timing measurements**

Disc Testing

By measuring the timing relationship between the read clock and the read data transition for many data bits, an estimate of the read error rate can be made. (See figure 1). The results of this margin test can be best observed in a histogram format. (See figure 2)

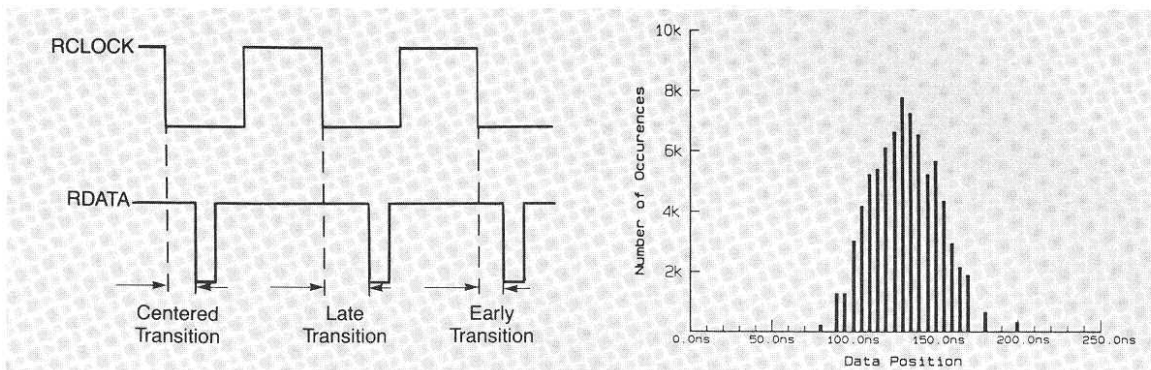


Figure 1.

Figure 2.

Digital Communications

The timing jitter accumulated over a communications link can be quickly assessed by measuring the bit-to-bit timing or the clock-to-bit edge timing. (See figure 3).

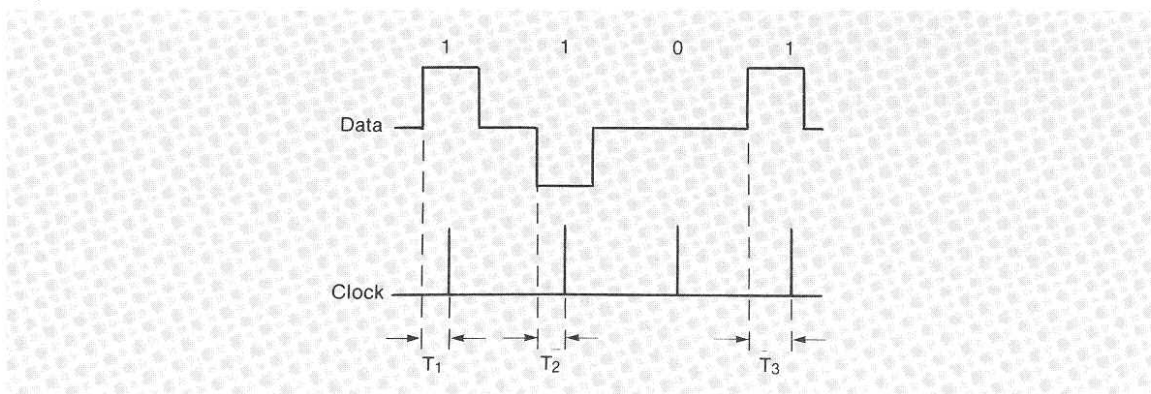


Figure 3.

IC Characterization

The drift in, for example, rise time with time or temperature can be rapidly ascertained. By taking many rise time measurements, (as many as 6000 per second), over a period of time – perhaps as some external parameter is varied – a plot such as that illustrated in figure 4 can point out picosecond variations in rise time.

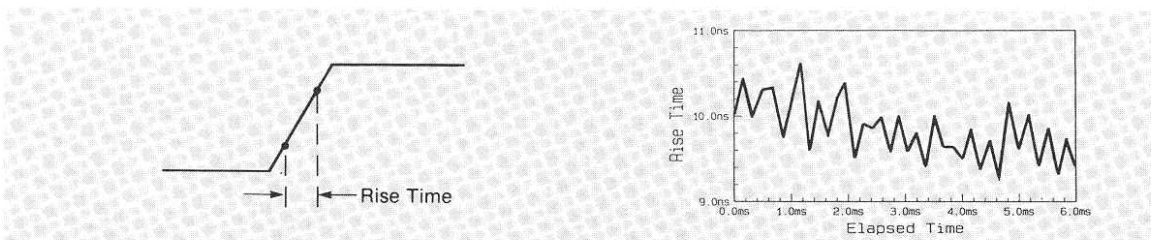


Figure 4.

Pulse Generator Characterization

Pulse width jitter, a key specification in precision pulse generators, can be quickly quantified and the statistics visualized as shown in figure 5.

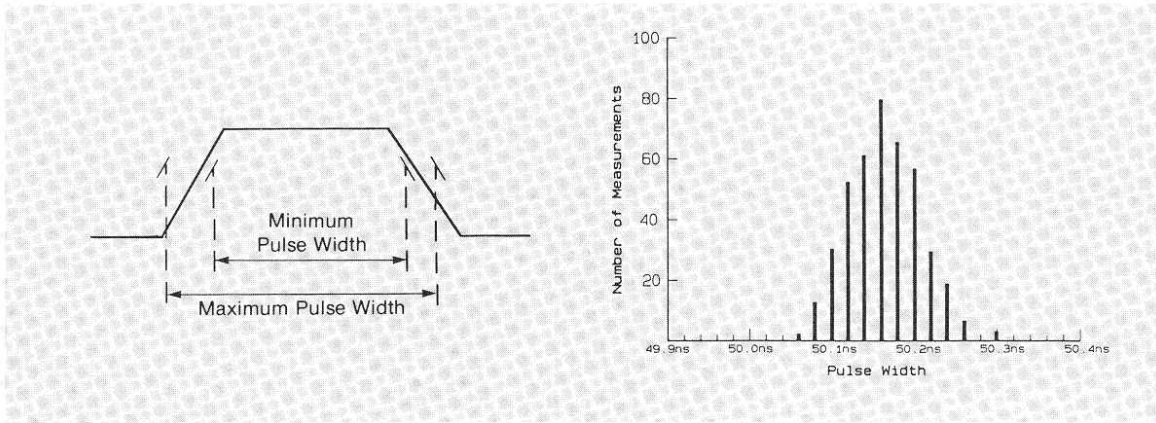


Figure 5.

Pulse Characterization

The traditional pulse parameters measured are illustrated in figure 6. Rise time is usually measured either from the 10% to 90% of peak-to-peak voltage levels or from 20% to 80% levels, as is fall time. Pulse width is generally measured at 50% of peak-to-peak voltage level.

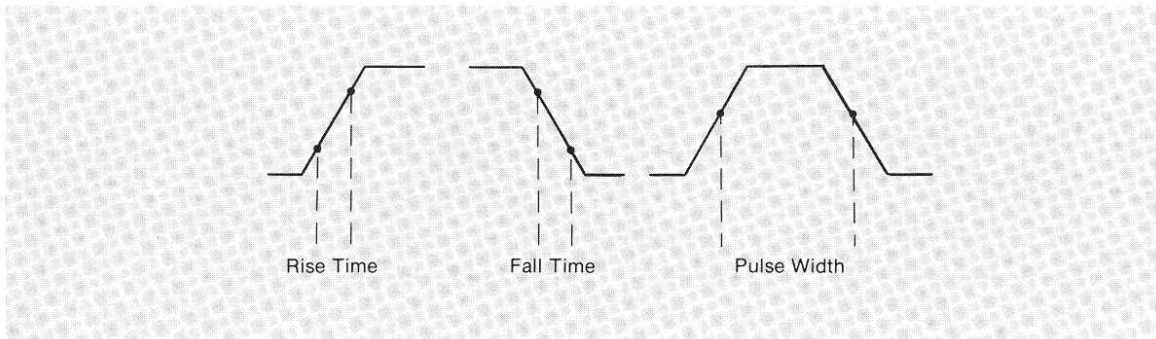


Figure 6.

The Effects of Instrument Bandwidth on Rise and Fall Time Measurements

As the edge speeds of a waveform approach the bandwidth limitations of the measuring instrument, distortion occurs. The general case is shown in figure 7.

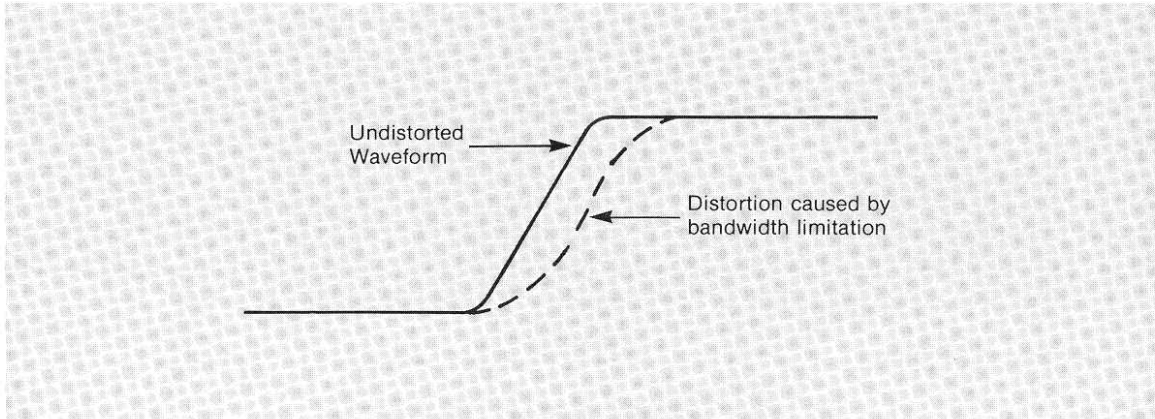


Figure 7.

To measure a signal's rise time accurately, the measurement system should have a rise time at least three times faster than that of the signal. Table 1 illustrates the effects of measuring a 2 nanosecond rise time signal with a range of instrument bandwidths. Similarly, table 2 shows the effects on a 5 nanosecond edge.

Measuring Instrument Bandwidth / Rise Time	Measured Rise Time	Percent Error from 2 ns
250 MHz / 1.75 ns	2.66 ns	33%
350 MHz / 1.00 ns	2.24 ns	12%
500 MHz / 0.70 ns	2.12 ns	6%
1 GHz / 0.35 ns	2.03 ns	2%

Table 1. Bandwidth Limitation Errors Measuring a 2 ns Rise Time.

Measuring Instrument Bandwidth / Rise Time	Measured Rise Time	Percent Error from 5 ns
250 MHz / 1.75 ns	5.30 ns	6.0%
350 MHz / 1.00 ns	5.10 ns	2.0%
500 MHz / 0.70 ns	5.05 ns	1.0%
1 GHz / 0.35 ns	5.01 ns	0.2%

Table 2. Bandwidth Limitation Errors Measuring a 5 ns Rise Time.

Counter or Oscilloscope to Characterize Pulse Parameters?

Which device to choose to characterize rise/fall time and pulse width is by no means obvious (assuming sufficient bandwidth is available). (Refer to tables 1 and 2.) There are several areas in which a counter makes a more effective analysis tool, and similarly others in which an oscilloscope is best. To help clarify, table 3 illustrates how choices can be made.

Counter works best when:	
• Events are non repetitive or infrequent	(Oscilloscopes generally need repetitive events)
• Measurement speed is important	(Because of their one shot nature, counters can make several thousand measurements per second)
• Operators have limited training	(Once parameters are known, a counter can be set up to measure manually or automatically very simply)
• High accuracy and resolution is required for long time intervals	(Counter resolution is not a function of time measured)
Oscilloscope works best when:	
• Visualization of the waveform is important	(Oscilloscopes allow the operator to integrate the "pattern" observed into data)
• Peak amplitude of the waveform is unknown	(It is tricky to ascertain the 20%, 50% and 80% points on a waveform with a counter)
• Voltage information must be gathered	(Oscilloscopes are inherently more useful for voltage measurements)

Table 3.

The rest of the time there is usually free choice between either device.

A Sample Program

Listed below is a sample program which uses many of the intrinsic capabilities of a Precision Time Interval Counter in characterizing pulse width, rise time and fall time.

The Equipment

The equipment configuration is shown in figure 8. It consists of a 5370B Time Interval Counter, 5363B Time Interval Probes, and a Series 200 computer which controls the measurement set-up and processes the results.

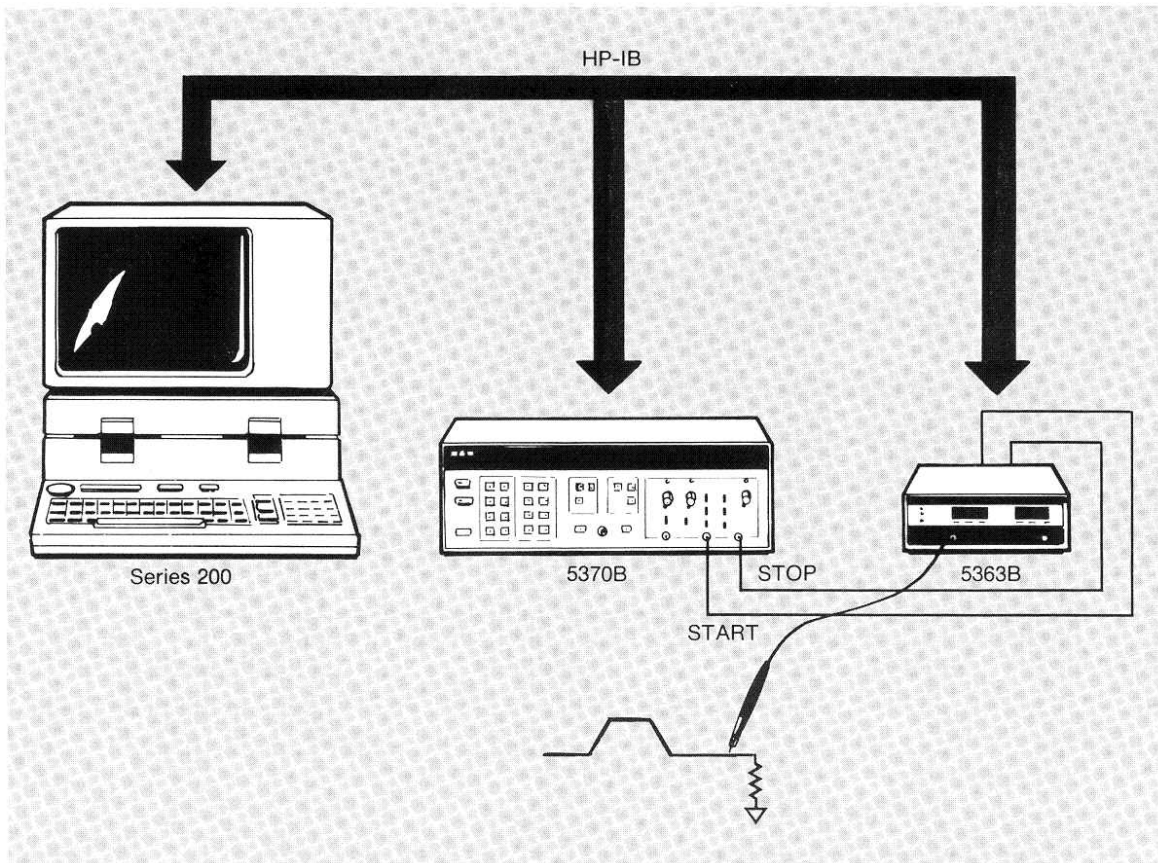


Figure 8.

The Program

The program will perform three major functions, demonstrating:

Rapid measurements with fast data transfer

Time vs elapsed time plot

Histogram sort and plot

The code is listed with explanations and options, and is followed by operating instructions. The program is written in BASIC for clarity, but will run faster if the time critical sections are written in Pascal, compiled, and subsequently called as CSUB's.

```

10!*****PROGRAM "PULSTAT" ***** 9/20/83 *** REV C. *****
20!
30!     PROGRAM TO AUTOMATICALLY MEASURE AND CHARACTERIZE RISE/FALL TIMES
40!     AND PULSE WIDTHS OF A SERIES OF DIGITAL PULSES.
50!
60!     SYSTEM REQUIRES ONE EACH OF THE FOLLOWING: 5370B, 5363B.
70!
80!
90!***** VARIABLES *****
100  OPTION BASE 1
110  DIM Counter$(50),Probe$(50),Generator$(50),Title$(50),Title1$(50),Title2$(50),Meas_id$(50)
120  DIM Stat_min$(20),Stat_max$(20),Stat_mean$(20),Stat_dev$(20),X_value$(10)
130  COM /Stats/ REAL Stat_min,Stat_max,Stat_mean,Stat_dev,Meas_time
140  COM /Sample/ INTEGER Max_samples,Dnum_samples,Dresolution,Mresolution
150  INTEGER Crt,Prtr,Counter_addr,Probe_addr,Generator_addr,Plotter_addr,Disp_length
160  INTEGER Resolution,Num_samples,Num_bins,Bin_num,X_pos,Xy_limits,X_maj,Y_maj
170  INTEGER Pw_auto_res,Pw_auto_samp,Rt_auto_res,Rt_auto_samp,Ft_auto_res,Ft_auto_samp !Auto_sample/resolution values
180  INTEGER False,True,T,F,Plot_yes,Plot_flag,T_plot_flag,Time_flag !Flags
190  !
200  ! *****INITIALIZATION *****
210  Crt=1
220  Prtr=701
230  False=0
240  True=1
250  F=False
260  T=True
270  Auto=F
280  Single=T
290  Contin=F
300  Time_flag=F
310  T_plot_flag=T
320  Plot_yes=F
330  Plot_flag=F
340  Max_samples=0
350  Maxx=.3
360  Minx=-Maxx
370  Stepx=.1
380  PRINTER IS Crt
390  Disp_length=50 ! Allows the 9826A to be used -- it has a 50 character display width

400  Plotter_addr=705
410  Counter_addr=703
420  Probe_addr=707
430  Dresolution=10 !INITIAL (DEFAULT) RESOLUTION OF DISPLAYED RESULTS IN ps
440  Mresolution=1
450  Resolution=Dresolution
460  Stat_min=0
470  Stat_max=0
480  Stat_mean=0
490  Stat_dev=0
500  Stat_min$="MIN = "
510  Stat_max$="MAX = "
520  Stat_mean$="MEAN = "
530  Stat_dev$="STD. DEV. = "
540  Meas_id$=" Put your measurement routine title here "
550  X_gdu_max=100*MAX(1,RATIO)
560  Y_gdu_max=100*MAX(1,1/RATIO)
570  Plot_left=.20*X_gdu_max

```

```

580 Plot_right=.80*X_gdu_max
590 Plot_bottom=.35*Y_gdu_max
600 Plot_top=.95*Y_gdu_max
610 !
620 ! ***** MAIN *****
630 !
640 Start: ! START OF PROGRAM
650     GINIT
660     GCLEAR
670     PRINT USING "@"
680     GOSUB Init_program
690     Num_arrays=5+3*8
700     Max_samples=MIN(ROUND(INT((VAL(SYSTEM$("AVAILABLE MEMORY")))-4500)/Num_
_arrays),2),65500/5)
710     Dnum_samples=MIN(Max_samples,1000) !DEFAULT SAMPLE SIZE
720     Num_samples=Dnum_samples          !INITIAL SAMPLE SIZE
730     GRAPHICS ON
740     PRINT USING "@"
750     ON KEY 0 LABEL "Pulse Width",13 GOSUB P_width
760     ON KEY 1 LABEL "Rise Time",13 GOSUB R_time
770     ON KEY 2 LABEL "Fall Time",13 GOSUB F_time
780     ON KEY 3 LABEL "Time Plot ON",14 GOSUB T_plot
790     IF Plot_yes THEN ON KEY 4 LABEL "Ext Plot OFF",14 GOSUB E_plot
800     ON KEY 5 LABEL "Chg Resolution",13 GOSUB Fix_resolution
810     ON KEY 6 LABEL "Chg # Samples",13 GOSUB Fix_samples
820     ON KEY 7 LABEL " DEMO ON",13 GOSUB Auto_demo
830     ON KEY 8 LABEL "Single ON",14 GOSUB Single_cont
840     ON KEY 9 LABEL "Quit",14 GOTO Quit
850     PRINT "Disp. Res.=";Resolution;"ps","Sample Size=";Num_samples
860     GINIT
870     GCLEAR
880 !
890 Wait_loop: DISP "Choose a key"
900             GOTO Wait_loop          !LOOP HERE BETWEEN MEASUREMENTS
910 !
920 !
930 !
940 ! ***** EXEC MEASUREMENT SUBROUTINES *****
950 !
960 P_width: !DO HISTOGRAM OF PULSE WIDTH
970             Title$="PULSE WIDTH "
980             Title1$="Pulse Width"
990             PRINT Title$
1000            Probe$="PGA+250URA+250DS" ! This is where trigger levels are set
                                                on the 5363B
1010            IF Auto THEN Resolution=Pw_auto_res
1020            IF Auto THEN Num_samples=Pw_auto_samp
1030            GOTO Do_it
1040!
1050 R_time: !DO HISTOGRAM OF PULSE RISE TIME
1060            Title$="RISE TIME "
1070            Title1$="Rise Time"
1080            PRINT Title$
1090            Probe$="PGA+050URA+450US" ! This is where trigger levels are set
                                                on the 5363B
1100            IF Auto THEN Resolution=Rt_auto_res
1110            IF Auto THEN Num_samples=Rt_auto_samp
1120            GOTO Do_it
1130!
1140 F_time: !DO HISTOGRAM OF PULSE FALL TIME
1150            Title$="FALL TIME "

```

```

1160 Title$="Fall Time"
1170 PRINT Title$
1180 Probe$="PGA+450DRA+050DS" ! This is where trigger levels are set
                                on the 5363B
1190 IF Auto THEN Resolution=Ft_auto_res
1200 IF Auto THEN Num_samples=Ft_auto_samp
1210 GOTO Do_it
1220 !
1230 Do_it: !COMPLETE THE MEASUREMENT
1240 PRINT USING "@@"
1250 DISP "Setting up measurement ..."
1260 Real_samples=Num_samples
1270 Real_samples=Real_samples*5
1280 Buffer_length=MIN(Real_samples,65500)
1290 ALLOCATE Tivalue(Num_samples) !Ti_data$ CONVERTED TO REAL VALUES
1300 GOSUB Make_measure
1310 IF NOT T_plot_flag THEN Sort
1320 GINIT
1330 GOSUB Time_plot
1340 IF NOT Plot_flag THEN Sort
1350 GOSUB Ext_plot
1360 GOSUB Time_plot
1370 GOSUB Int_plot
1380 Sort: GOSUB Sort_data
1390 GOSUB Get_stats
1400 Num_bins=((Stat_max-Stat_min)*(1.E+12)/Resolution)+1
1410 ALLOCATE INTEGER Hist(Num_bins) !DIMENSION LARGEST POSSIBLE Hist(*)
1420 ALLOCATE Hist_value(Num_bins) !VALUES ASSIGNED TO EACH BIN
1430 GOSUB Compute_hist
1440 GINIT
1450 GOSUB Graph_it
1460 IF NOT Plot_flag THEN Deal1
1470 GOSUB Ext_plot
1480 GOSUB Graph_it
1490 GOSUB Int_plot
1500 Deal1: DEALLOCATE Hist_value(*)
1510 DEALLOCATE Hist(*)
1520 DEALLOCATE Tivalue(*)
1530 IF Auto THEN Wait
1540 IF Contin THEN Do_it
1550 LINPUT "Do another measurement? (y/n)",Answer$
1560 IF UPC$(Answer$[1,1])="Y" THEN Do_it
1570 GOTO Finished
1580 Wait: IF Contin THEN Finished
1590 DISP "Hit CONTINUE to proceed."
1600 PAUSE
1610 Finished: RETURN
1620 !
1630 !
1640 !***** DATA GATHERING AND DISPLAY SUBROUTINES CALLED BY EXECS *****
1650 !
1660 Make_measure: !MAKE Num_sample TI MEASUREMENTS
1670 Open_files: ALLOCATE Tidata$(1:Num_samples)[5] !RAW TI DATA
1680 ASSIGN @Counter TO Counter_addr;BYTE
1690 ASSIGN @Buffer TO BUFFER [INT(Buffer_length)]
1700 OUTPUT Probe_addr;Probe$
1710 CLEAR @Counter !INITIALIZE COUNTER
1720 OUTPUT @Counter;"IN1"
1730 OUTPUT @Counter;"SRSA1S01"
1740 OUTPUT @Counter;"TRTA0"
1750 OUTPUT @Counter;"T00"

```

```

1760          OUTPUT @Counter;"SS1TB!" !SEND FAST BINARY COMMAND
1770          !ENTER @ COUNTER USING "-K";Buf$ ! Used only for 5370A
1780          Total_time=0
1790          DISP "Making "&Title!$&" measurements (FAST TI) ..."
1800          ON EDT @Counter,15 GOSUB Stop_timer
1810          TRIGGER @Counter !BEGIN MEASUREMENT -Delete fo 5370A
1820          Start_time=TIMEDATE
1830 !
1840 !*** I/O MODE #1 *** approximately 700 readings/sec *****
1850 !
1860          TRANSFER @Counter TO @Buffer;RECORDS Buffer_length/5,EOR (COU
NT 5,END)
1870 ! This is the most flexible mode. It uses EOI to divide the records, thus
1880 ! slowing the transfer, but allowing a sample size to be determined while
1890 ! the program is running.
1900 !
1910 !*** I/O MODE #2 *** approximately 5000 readings/sec *****
1920 !
1930 !          TRANSFER @Counter TO @Buffer;WAIT
1940 !
1950 ! This is the fastest mode. It requires that the 5370B or the HP-IB cable
1960 ! be modified so EOI is not asserted on the last byte of each 5 byte
1970 ! transfer. Due to uncertainty about the first 5 bytes output, this
1980 ! scheme will not work with an unmodified 5370A. Also it fills all of
1990 ! Tidata(*), so the sample size must be determined by program editing.
2000 !
2010 !*** I/O MODE #3 *** approximately 500 readings/sec *****
2020 !
2030 !          ENTER @Counter USING "Y";Tidata(*)
2040 !          GOSUB Stop_timer ! Fake EDT
2050 !
2060 ! This method provides slower I/O than the formatted transfer scheme,
2070 ! and is formatted to take care of EOI. It fills all of Tidata(*), so
2080 ! the sample size must be determined by program editing.
2090 !
2100          DISP "Dumping data buffer into string array ..."
2110          FOR I=1 TO Num_samples
2120          ENTER @Buffer USING "%,5A":Tidata$(I) !FILL TI_DATAS(*)
2130          NEXT I
2140          LOCAL @Counter !CLEAR FAST TI MODE
2150          DISP "Converting TI values from fast data format ..."
2160          Convert_ti(Tidata$(*),Tvalue*(*), (Num_samples), (Resolution))
2170          ASSIGN @Buffer TO * !RELEASE MEMORY
2180          ASSIGN @Counter TO *
2190          DEALLOCATE Tidata$(*)
2200          PRINT USING "@
2210          DISP ""
2220          RETURN
2230 !
2240 Stop_timer: Stop_time=TIMEDATE
2250          Meas_time=(INT((Stop_time-Start_time)*100))/100
2260          Total_time=Total_time+Meas_time
2270          Meas_time=Total_time
2280          ABORTIO @Counter
2290          LOCAL @Counter !CLEAR FAST TI MODE: remove this line for
multiple buffer transfers!
2300          RETURN
2310 !
2320 !
2330 Time_plot: !DO A PLOT OF SAMPLE VALUES VS. MEASUREMENT TIME
2340          GCLEAR

```

```

2350      Time_flag=T
2360      Title2$=Title$&"VALUES VS.TIME"
2370      PEN 1
2380      GOSUB Do_titles
2390      Xy_limits=INT(Meas_time*100)
2400      X_maj=FNSel_ax(Xy_limits)
2410      Xy_limits=INT(((MAX(Tivalue(*))-MIN(Tivalue(*)))*1.E+12/Resoluti
on)+.5)
2420      IF Xy_limits<1 THEN Xy_limits=1
2430      Y_maj=FNSel_ax(Xy_limits)
2440      VIEWPORT Plot_left,Plot_right,Plot_bottom,Plot_top
2450      FRAME
2460      WINDOW 0,Meas_time*100,0,Xy_limits  !SIZE/ASPECT RATIO OF GRAPH
2470      AXES X_maj/5,Y_maj/5,0,0,X_maj,Y_maj
2480      PENUP
2490      WINDOW Plot_left,Plot_right,Plot_bottom,Plot_top
2500      CLIP OFF
2510      CSIZE 3.5,.6
2520      LORG 6
2530      MOVE (Plot_right-Plot_left)/2+Plot_left,Plot_bottom-.07*Y_gdu_ma
x
2540      LABEL "Time Into the Measurement (sec)"
2550      LORG 4
2560      DEG
2570      LDIR 90
2580      MOVE Plot_left-.13*X_gdu_max,(Plot_top-Plot_bottom)/2+Plot_botto
m
2590      LABEL Title1$&" Values (ns)"
2600      LDIR 0
2610      WINDOW 0,100,0,Xy_limits  !Y AXIS MUST MATCH GRAPH
2620      PEN 3
2630      LORG 8
2640      FOR I=0 TO Xy_limits STEP Y_maj  !PUT VALUES ON Y AXIS
2650      X_val=MIN(Tivalue(*))+I*(1.E-12)*Resolution
2660      MOVE -.5,I  !SMIDGEON TO THE LEFT
2670      GOSUB Draw_param
2680      NEXT I
2690      LORG 6
2700      WINDOW 0,Meas_time*100,0,20  !X AXIS MUST MATCH GRAPH
2710      MOVE 0,-.5  !SMIDGEON UNDERNEATH X AXIS
2720      LABEL USING "#,K";0
2730      MOVE Meas_time*100,-.5
2740      LABEL USING "#.DDDD.DD";Meas_time
2750      WINDOW 0,Meas_time*100,0,Xy_limits  !SIZE/ASPECT RATIO OF GRAPH
2760      CLIP ON
2770      PEN 2
2780      MOVE 0,0
2790      Plot_ratio=(Num_samples/(Meas_time*100))
2800      J=1
2810      FOR I=1 TO Meas_time*100
2820      DRAW I,((Tivalue(INT(J))-MIN(Tivalue(*)))*1.E+12)/Resolution
2830      J=J+Plot_ratio
2840      NEXT I
2850      PENUP
2860      Time_flag=F
2870      RETURN
2880      !
2890      !
2900      Sort_data:  DISP "Sorting data samples ..."
2910      MAT SORT Tivalue
2920      DISP ""

```

```

2930             RETURN
2940 !
2950 !
2960 Get_stats: DISP "Computing statistics ..."
2970             Compute_stat(Tvalue(*),(Num_samples),(Resolution),Stat_min,Sta
t_max,Stat_mean,Stat_dev)
2980             DISP ""
2990             RETURN
3000 !
3010 !
3020 Compute_hist: DISP "Filling histogram bins ... "
3030             Bin_num=0
3040             FOR I=Stat_min TO Stat_max+Resolution/2.E+12 STEP Resolution/
1.E+12
3050                 Bin_num=Bin_num+1
3060                 Hist_value(Bin_num)=I+Resolution/2.E+12
3070                 NEXT I
3080                 MAT Hist= Hist*(0)
3090                 Fill_hist(Tvalue(*),Hist_value(*),(Num_samples),Hist*),(Num
_bins))
3100                 DISP ""
3110                 RETURN
3120 !
3130 !
3140 Graph_it: Title2$=Title$+"HISTOGRAM"           !DRAW THE HISTOGRAM DISPLAY
3150             GCLEAR
3160             PEN 1
3170             GOSUB Do_titles
3180             GOSUB Plot_axes
3190             PEN 3
3200             GOSUB Label_axes
3210             PEN 2
3220             GOSUB Plot_hist
3230             PEN 4
3240             GOSUB Do_param
3250             RETURN
3260 !
3270 !
3280 !***** "Graph_it" SUBROUTINES *****
3290 !
3300 Do_titles: !SUBROUTINE TO PUT TITLES AND PARAMETER NAMES ON PLOT
3310             VIEWPORT 0,X_gdu_max,0,Y_gdu_max
3320             LORG 6
3330             CSIZE 5..6
3340             FOR I=Minx TO Maxx STEP Stepx
3350                 LORG 6
3360                 MOVE X_gdu_max/2+I,Y_gdu_max
3370                 LABEL Title2$
3380                 PENUP
3390                 LORG 4
3400                 MOVE X_gdu_max/2+I,8           !PLACE TITLE ABOVE SOFT KEYS
3410                 LABEL Id$;
3420                 NEXT I
3430             VIEWPORT .14*X_gdu_max,.86*X_gdu_max,.08*Y_gdu_max,.13*Y_gdu_max
3440             WINDOW .14*X_gdu_max,.86*X_gdu_max,.08*Y_gdu_max,.13*Y_gdu_max
3450             FRAME
3460             IF Time_flag THEN T_done
3470             VIEWPORT .08*X_gdu_max,.92*X_gdu_max,.13*Y_gdu_max,.19*Y_gdu_max
3480             WINDOW .08*X_gdu_max,.92*X_gdu_max,.13*Y_gdu_max,.19*Y_gdu_max
3490             FRAME
3500             LORG 2

```



```

3510          CSIZE 2.8,.6
3520          MOVE .08*X_gdu_max+4,.13*Y_gdu_max+4
3530          LABEL Stat_min$;
3540          MOVE .08*X_gdu_max+4,.13*Y_gdu_max+2
3550          LABEL Stat_max$;
3560          MOVE .08*X_gdu_max+60,.13*Y_gdu_max+4
3570          LABEL Stat_mean$;
3580          MOVE .08*X_gdu_max+60,.13*Y_gdu_max+2
3590          LABEL Stat_dev$;
3600 T_done:  PENUP
3610          RETURN
3620 !
3630 !
3640 Plot_axes:! SIZE/DRAW AXES ACCORDING TO HISTOGRAM VALUES
3650          VIEWPORT Plot_left,Plot_right,Plot_bottom,Plot_top
3660          WINDOW 0,Num_bins,0,MAX(Hist(*)) !SIZE/ASPECT RATIO OF GRAPH
3670          LINE TYPE 1
3680          X_maj=FNSel_ax(Num_bins)
3690          Xy_limits=MAX(Hist(*))
3700          Y_maj=FNSel_ax(Xy_limits)
3710          AXES X_maj/5,1,0,0,X_maj,Y_maj
3720          PENUP
3730          RETURN
3740 !
3750 !
3760 !
3770 Label_axes:!SUBROUTINE TO PUT LABEL VALUES ON HISTOGRAM AXIS
3780          VIEWPORT Plot_left,Plot_right,Plot_bottom,Plot_top
3790          WINDOW Plot_left,Plot_right,Plot_bottom,Plot_top
3800          CLIP OFF
3810          CSIZE 3.5,.6
3820          LORG 4
3830          DEG
3840          LDIR 90
3850          MOVE Plot_left-.13*X_gdu_max,(Plot_top-Plot_bottom)/2+Plot_bottom
3860          LABEL "Occurences"
3870          LDIR 0
3880          LORG 6
3890          MOVE (Plot_right-Plot_left)/2+Plot_left,Plot_bottom-.07*Y_gdu_max
3900          LABEL Title1$&" Measurements (ns)"
3910          WINDOW 0,100,0,MAX(Hist(*)) !Y AXIS MUST MATCH GRAPH
3920          LORG 8
3930          FOR I=0 TO MAX(Hist(*)) STEP Y_maj !PUT VALUES ON Y AXIS
3940          MOVE -.5,I !SMIDGEON TO THE LEFT
3950          LABEL USING "#,K";I
3960          NEXT I
3970          WINDOW 0,Num_bins,0,20 !X AXIS MUST MATCH GRAPH
3980          LORG 6
3990 !MIN X VALUE
4000          X_val=Stat_min
4010          X_pos=FNX_pos(X_val,Hist_value(*),Num_bins)
4020          X_value$="min"
4030          Value_flag=T
4040          GOSUB Label_it
4050 !MAX X VALUE
4060          X_val=Stat_max
4070          X_pos=FNX_pos(X_val,Hist_value(*),Num_bins)
4080          X_value$="max"
4090          GOSUB Label_it

```

```

4100 !MEAN X VALUE
4110     X_val=Stat_mean
4120     X_pos=FNX_pos(X_val,Hist_value(*),Num_bins)
4130     X_value$="mean"
4140     GOSUB Label_it
4150     Line=7
4160     Descent=.006*Y_gdu_max
4170     X_offset=0
4180     GOSUB Draw_line
4190 !LOW STANDARD DEVIATION BOUNDARY
4200     X_val=Stat_dev
4210     X_pos=FNX_pos(ROUND((Stat_mean-X_val)*1.E+12,LGT(Resolution))*1
.E-12,Hist_value(*),Num_bins)
4220     Value_flag=F
4230     Line=4
4240     Descent=.003*Y_gdu_max
4250     IF Resolution<=10 THEN X_offset=-.004*X_gdu_max
4260     GOSUB Draw_line
4270 !HIGH STANDARD DEVIATION BOUNDARY
4280     X_pos=FNX_pos(ROUND((Stat_mean+X_val)*1.E+12,LGT(Resolution))*1
.E-12,Hist_value(*),Num_bins)
4290     Line=4
4300     Descent=.003*Y_gdu_max
4310     IF Resolution<=10 THEN X_offset=.004*X_gdu_max
4320     GOSUB Draw_line
4330     PENUP
4340     RETURN
4350 !
4360 !
4370 Label_it: !PUT LABEL ON X AXIS (WITH VALUE)
4380     WINDOW 0,Num_bins,0,20 !X AXIS MUST MATCH GRAPH, Y IS FIXED
4390     CLIP OFF
4400     MOVE X_pos,-1.3
4410     LABEL X_value$
4420     IF NOT Value_flag THEN Lbl_done
4430     MOVE X_pos,-.5
4440     GOSUB Draw_param
4450 Lbl_done: PENUP
4460     RETURN
4470 !
4480 Draw_line: LINE TYPE Line !DRAW MEAN AND STD. DEV LINES
4490     WINDOW 0,Num_bins,0,MAX(Hist(*)) !BOTH AXES MUST MATCH GRAPH
4500     CLIP OFF
4510     PEN 4
4520     MOVE X_pos+X_offset,0
4530     DRAW X_pos+X_offset,MAX(Hist(*))
4540     PENUP
4550     !DRAW DESCENDER
4560     WINDOW 0,Num_bins,0,20 !X AXIS MUST MATCH GRAPH, Y IS FIXED
4570     CLIP OFF
4580     MOVE X_pos+X_offset,0
4590     DRAW X_pos+X_offset,-Descent
4600     PENUP
4610     LINE TYPE 1
4620     X_offset=0
4630     Descent=0
4640     RETURN
4650 !
4660 !
4670 Plot_hist: !SUBROUTINE TO PLOT THE HISTOGRAM OF THE DATA IN T:VALUE.
4680     VIEWPORT Plot_left,Plot_right,Plot_bottom,Plot_top

```

```

4690          WINDOW 0,Num_bins,0,MAX(Hist(*))      !MUST MATCH GRAPH
4700          LINE TYPE 1
4710          MOVE -2,0
4720          FOR I=1 TO Num_bins
4730          MOVE I,0
4740          DRAW I,Hist(I)
4750          NEXT I
4760          PENUP
4770          RETURN
4780          !
4790          !
4800          Do_param:      ! ENTRY POINT FOR DISPLAY OF PARAMETER VALUES
4810          VIEWPORT .08*X_gdu_max,.92*X_gdu_max,.13*Y_gdu_max,.19*Y_gd
_max
4820          WINDOW .08*X_gdu_max,.92*X_gdu_max,.13*Y_gdu_max,.19*Y_gdu_
ax
4830          LINE TYPE 1
4840          LDRG 2
4850          CSIZE 2.8,.6
4860          MOVE .08*X_gdu_max+24,.13*Y_gdu_max+4
4870          X_val=Stat_min
4880          GOSUB Draw_param
4890          MOVE .08*X_gdu_max+24,.13*Y_gdu_max+2
4900          X_val=Stat_max
4910          GOSUB Draw_param
4920          MOVE .08*X_gdu_max+85,.13*Y_gdu_max+4
4930          X_val=Stat_mean
4940          GOSUB Draw_param
4950          MOVE .08*X_gdu_max+85,.13*Y_gdu_max+2
4960          LABEL USING "#,DDD.DDD";Stat_dev*1.E+9
4970          PENUP
4980          RETURN
4990          !
5000          Draw_param:  !DRAW PARAMETERS WITH PROPER RESOLUTION
5010          SELECT INT(LGT(Resolution))
5020          CASE =0
5030          LABEL USING "#,DDD.DDD";X_val*1.E+9
5040          CASE =1
5050          LABEL USING "#.DDD.DD";X_val*1.E+9
5060          CASE =2
5070          LABEL USING "#,DDD.D";X_val*1.E+9
5080          CASE =3
5090          LABEL USING "#,DDD";X_val*1.E+9
5100          END SELECT
5110          PENUP
5120          RETURN
5130          !
5140          !
5150          !*****RESOLUTION AND SAMPLE SIZE SUBROUTINES *****
5160          !
5170          Fix_resolution: !SUBROUTINE TO CHANGE THE MEASUREMENT RESOLUTION
5180          IF Auto THEN Resolution=Dresolution
5190          IF Auto THEN Fr_done
5200          PRINT USING "@"
5210          GCLEAR
5220          PRINT "Enter the desired resolution of the display"
5230          PRINT "in ps."
5240          Res_entry(Resolution)
5250          PRINT USING "@"
5260          PRINT "Disp. Res.=";Resolution;"ps"."Sample Size=";Num_samp
les

```

```

5270             RETURN
5280 !
5290 !
5300 Fix_samples: !SUBROUTINE TO SET/ADJUST THE NUMBER OF SAMPLES TAKEN FOR THE
5310             !HISTOGRAM PLOT
5320             IF Auto THEN Num_samples=Dnum_samples
5330             IF Auto THEN Fs_done
5340             PRINT USING "@"
5350             GCLEAR
5360             PRINT "Enter the number of samples to be taken."
5370             PRINT "NOTE: The max value shown below is a typical"
5380             PRINT "      maximum based upon the amount of memory"
5390             PRINT "      presently installed in the computer,"
5400             PRINT "      with the number of samples set equal to"
5410             PRINT "      the number of histogram bins. "
5420             PRINT "      The actual maximum may be lower or"
5430             PRINT "      higher depending upon the range of"
5440             PRINT "      samples taken and the displayed"
5450             PRINT "      resolution value chosen."
5460             PRINT
5470             Samp_entry(Num_samples)
5480             PRINT USING "@"
5490             PRINT "Disp. Res.=";Resolution;"ps","Sample Size=";Num_samples
5500             RETURN
5510 !
5520 !
5530 !***** PLOTTER CONTROL SUBROUTINES *****
5540 !
5550 Ext_plot:  GINIT
5560             PLOTTER IS Plotter_addr,"HPGL"
5570             Minx=1
5580             Maxx=1
5590             Stepx=1
5600             RETURN
5610 !
5620 Int_plot:  GINIT
5630             PLOTTER IS 3,"INTERNAL"
5640             Maxx=.2
5650             Minx=-Maxx
5660             Stepx=.1
5670             RETURN
5680 !
5690 !
5700 !***** FUNCTION KEY LABELS AND FLAG SUBROUTINES *****
5710 !
5720 Auto_demo: Auto=NOT (Auto)
5730             SELECT Auto
5740             CASE =F
5750                 ON KEY 7 LABEL " DEMO ON",13 GOSUB Auto_demo
5760                 GOTO Auto_done
5770             CASE =T
5780                 ON KEY 7 LABEL "AUTODEMO ON",13 GOSUB Auto_demo
5790             END SELECT
5800 Set_auto_param:  Res_entry(Pw_auto_res,"SET RESOLUTION OF THE PULSE WIDTH
HISTOGRAM")
5810                 Samp_entry(Pw_auto_samp,"SET SAMPLE SIZE FOR THE PULSE WI
DTH HISTOGRAM")
5820                 Res_entry(Rt_auto_res,"SET RESOLUTION OF THE RISE TIME HI
STOGRAM")
5830                 Samp_entry(Rt_auto_samp,"SET SAMPLE SIZE FOR THE RISE TIM
E HISTOGRAM")

```

```

5840                               Res_entry(Ft_auto_res,"SET RESOLUTION OF THE FALL TIME HI
STOGRAM")
5850                               Samp_entry(Ft_auto_samp,"SET SAMPLE SIZE FOR THE FALL TIM
E HISTOGRAM")
5860                               Contin=False
5870                               GOSUB Single_cont
5880 Do_auto:                       GOSUB P_width
5890                               GOSUB R_time
5900                               GOSUB F_time
5910                               GOTO Do_auto
5920 Auto_done: RETURN
5930 !
5940 !
5950 Single_cont: Contin=NOT (Contin)
5960                               ON KEY 8 LABEL "Cont ON",14 GOSUB Single_cont
5970                               IF NOT Contin THEN ON KEY 8 LABEL "Single ON",14 GOSUB Single_
cont
5980                               RETURN
5990 !
6000 !
6010 T_plot: T_plot_flag=NOT (T_plot_flag)
6020                               ON KEY 3 LABEL "Time Plot ON",14 GOSUB T_plot
6030                               IF NOT T_plot_flag THEN ON KEY 3 LABEL "Time Plot OFF",14 GOSUB T_p
lot
6040                               RETURN
6050 !
6060 !
6070 E_plot: Plot_flag=NOT (Plot_flag)
6080                               ON KEY 4 LABEL "Ext Plot OFF",14 GOSUB E_plot
6090                               IF Plot_flag THEN ON KEY 4 LABEL "Ext Plot ON",14 GOSUB E_plot
6100                               RETURN
6110 !
6120 !
6130 Init_program: !*** DEFINE EQUIPMENT SETUP *****
6140                               IF TRIMS(SYSTEM$( "SYSTEM ID"))="9836A" THEN Disp_length=80
6150                               PRINT TABXY(INT((Disp_length-LEN(Meas_id$))/2),1);Meas_id$
6160                               PRINT TABXY(1,3);"Equipment Required:"
6170                               PRINT TAB(3);"5370B Universal Time Interval Counter"
6180                               PRINT TAB(3);"5363B Time Interval Probes"
6190                               PRINT TAB(3);"9826/36 Desktop Computer"
6200                               PRINT TABXY(1,8);"This procedure is designed to show the"
6210                               PRINT "capabilities of the 5370B Universal Time Interval"
6220                               PRINT "Counter and 5363B Time Interval Probes in"
6230                               PRINT "measuring pulse stream characteristics. From these"
6240                               PRINT "measurements of pulse width or rise/fall time a"
6250                               PRINT "histogram is generated showing measured time"
6260                               PRINT "vs. number of occurrences."
6270                               PRINT
6280                               PRINT "If not already done, be sure to calibrate the"
6290                               PRINT "5363B probes to ensure accurate TI measurement."
6300                               INPUT "Counters' HP-IB address ? (default=703)",Counter_addr
6310                               PRINT TABXY(41,4);"HP-IB=";Counter_addr
6320                               ASSIGN @Counter TO Counter_addr
6330                               INPUT "TI Probe's HP-IB address ? (default=707)",Probe_addr
6340                               PRINT TABXY(41,5);"HP-IB=";Probe_addr
6350                               Id$=" graph title "
6360                               INPUT "Do you plan on using an HPGL PLOTTER (Y/N)?",Answer$
6370                               IF Answer$(1,1)="Y" OR Answer$(1,1)="y" THEN Yes_plot
6380                               GOTO Init_exit
6390 Yes_plot: INPUT "Plotters' HP-IB address? (default=705)",Plotter_addr
6400                               Plot_yes=T

```

```

6410 Init_exit:   RETURN
6420 !
6430 !
6440 Quit:!! CLEAR GRAPHICS, VARIABLES, LOCAL HP-IB AND QUIT.
6450   GCLEAR
6460   GINIT
6470   PRINT USING "@"
6480   DISP ""
6490   ASSIGN @Buffer TO *
6500   ASSIGN @Counter TO *
6510   OFF KEY 0
6520   OFF KEY 1
6530   OFF KEY 2
6540   OFF KEY 3
6550   OFF KEY 4
6560   OFF KEY 5
6570   OFF INTR
6580   CLEAR Counter_addr
6590   CLEAR Probe_addr
6600   LOCAL Counter_addr
6610   LOCAL Probe_addr
6620 END
6630 !
6640 !***** END OF MAIN PROGRAM *****
6650 !
6660 !
6670 !***** SUBPROGRAMS AND FUNCTIONS *****
6680 !
6690 SUB Res_entry(INTEGER Resolution,OPTIONAL A_res$)
6700 COM /Sample/ INTEGER Max_samples,Dnum_samples,Dresolution,Mresolution
6710   ALLOCATE Resolution$(20)
6720   PRINT "min=";Mresolution;"", max= 1000, default="";Dresolutio
n
6730   PRINT
6740   IF NPAR=1 THEN Get_res
6750   PRINT A_res$
6760 Get_res:   Resolution$=""
6770   INPUT Resolution$
6780   Resolution$=UPC$(TRIM$(Resolution$))
6790   SELECT Resolution$
6800     CASE ""
6810       Resolution=0
6820       GOTO Set_res
6830     CASE "MIN"
6840       Resolution=Mresolution
6850       GOTO Fr_done
6860     CASE "MAX"
6870       Resolution=9999
6880       GOTO Set_res
6890   END SELECT
6900   Resolution=VAL(Resolution$)
6910 Set_res:   IF Resolution<=0 THEN Resolution=Dresolution
6920   IF Resolution<1 THEN 5190
6930   IF Resolution>9999 THEN Resolution=1000
6940 Fr_done: Resolution=10^INT(LGT(Resolution)) !INTEGER POWERS OF 10 ONLY
6950   DEALLOCATE Resolution$
6960   SUBEND
6970 !
6980 !
6990 !
7000 SUB Samp_entry(INTEGER Num_samples,OPTIONAL A_samp$)

```

```

7010 COM /Sample/ INTEGER Max_samples,Dnum_samples,Dresolution,Mresolution
7020     ALLOCATE Num_samples$(20)
7030     PRINT "max=";Max_samples;", default=";Dnum_samples
7040     PRINT
7050     IF NPAR=1 THEN Get_samp
7060     PRINT A_samp$
7070 Get_samp:   Num_samples$=""
7080             LINPUT Num_samples$
7090             Num_samples$=UPC$(TRIMS$(Num_samples$))
7100             SELECT Num_samples$
7110             CASE =""
7120                 Num_samples=0
7130                 GOTO Set_samp
7140             CASE ="MIN"
7150                 Num_samples=1
7160                 GOTO Fs_done
7170             CASE ="MAX"
7180                 Num_samples=Max_samples
7190                 GOTO Fs_done
7200             END SELECT
7210             Num_samples=VAL(Num_samples$)
7220             IF Num_samples>Max_samples THEN
7230                 BEEP
7240                 DISP " Entered value (";Num_samples;) is > max"
7250                 WAIT 2
7260                 Num_samples=Max_samples
7270             END IF
7280 Set_samp:   IF Num_samples<=0 THEN Num_samples=Dnum_samples
7290 Fs_done:   DEALLOCATE Num_samples$
7300             PRINT USING "@_"
7310             SUBEND
7320 !
7330 !
7340 !
7350 SUB Convert_ti(Tidata$(*),REAL Tivalue(*),INTEGER Array_size,Res)
7360 !
7370 !Converts raw TI data in Tidata$(*) to REAL time interval values, trims to
       (Res) resolution, and passes back as the REAL array Tivalue(*).
7380 !
7390             INTEGER I
7400             Const1=2^16
7410             Const2=2^8
7420             Const3=2^17
7430             Const4=2^18
7440             FOR I=1 TO Array_size
7450                 N=NUM(Tidata$(I)[4,4])*256+NUM(Tidata$(I)[5,5])
7460                 Q=1
7470                 IF NOT BIT(INT(NUM(Tidata$(I)[1])),5) THEN Q=-1
7480                 B=BINAND(NUM(Tidata$(I)[1]),3)*Const1+NUM(Tidata$(I)[2,2])*Co
nst2+NUM(Tidata$(I)[3,3])
7490                 IF B>=Const3 THEN B=B-Const4
7500                 Counter_ti=(B/256+N*Q)*5.E-9 !5370B 'FAST BINARY' TI EQUATION
7510                 Tivalue(I)=PROUND((Counter_ti)*1.E+12.LGT(Res))/1.E+12
7520 Next_samp: NEXT I
7530             SUBEND
7540 !
7550 !
7560 !
7570 DEF FNX_pos(Value,Array(*),INTEGER Array_size)
7580 !Return the exact or next highest bin number belonging to Value in Array(*)

```

```

7590         INTEGER Curr_pos,Next_pos,Low_limit,High_limit
7600         Low_limit=0
7610         High_limit=Array_size+1
7620         Curr_pos=INT((Array_size/2)+.51)
7630 Another_x:  SELECT Value
7640             CASE =Array(Curr_pos)
7650             GOTO Found_x
7660 !
7670             CASE <Array(Curr_pos)
7680             High_limit=Curr_pos
7690             IF Curr_pos>1 THEN
7700             IF Value>Array(Curr_pos-1) THEN Found_x
7710             END IF
7720             Curr_pos=Curr_pos-INT((High_limit-Low_limit)/2)
7730             IF Curr_pos>1 THEN Another_x
7740             Curr_pos=1
7750             GOTO Found_x
7760 !
7770             CASE >Array(Curr_pos)
7780             Low_limit=Curr_pos
7790             IF Curr_pos<Array_size AND Value<Array(Curr_pos+1) THEN Co
rrect_x
7800             Curr_pos=Curr_pos+INT((High_limit-Low_limit)/2)
7810             IF Curr_pos<Array_size THEN Another_x
7820             Curr_pos=Array_size
7830             GOTO Found_x
7840         END SELECT
7850 Correct_x: Curr_pos=Curr_pos+1
7860 Found_x:  RETURN Curr_pos
7870         FNEND
7880 !
7890 !
7900 !
7910 SUB Fill_hist(REAL Sample_array(*),Range(*),INTEGER S_array_size,Hist(*),H_
array_size)
7920 !
7930 !Sample_array(*) is a real array of <S_array_size> size,
7940 !containing MAT SORT(ed) values, low to high.
7950 !The Range(*) array contains the quantized values for the histogram
7960 !(ie,x axis) to which the samples in Sample_array must be matched.
7970 !The Hist(*) array is filled by this routine according to the number
7980 !of samples in Sample_array which fit each value of Range(*).
7990 !
8000         INTEGER I,Bin_number
8010         Bin_number=1
8020         FOR I=1 TO S_array_size
8030 Try_again:  ! COUNT SAMPLE INTO FIRST BIN THAT IT CROSSES THE THRESHOLD OF
8040             IF Sample_array(I)<Range(Bin_number) THEN
8050             Hist(Bin_number)=Hist(Bin_number)+1
8060             GOTO Next_tivalue
8070             END IF
8080             Bin_number=Bin_number+1
8090             IF Bin_number>H_array_size THEN Next_tivalue ! IN CASE ALL
ZERO'S
8100             GOTO Try_again
8110 !
8120 Next_tivalue: NEXT I
8130         SUBEND
8140 !
8150 !
8160 !

```



```

8170 DEF FNSEL_ax(INTEGER Axis_limit)
8180     INTEGER Xy_maj
8190     Xy_maj=1
8200     SELECT Axis_limit !GET CORRECT MAJOR LABEL
8210     CASE >5000
8220         Xy_maj=1000
8230     CASE >1000
8240         Xy_maj=500
8250     CASE >500
8260         Xy_maj=100
8270     CASE >100
8280         Xy_maj=50
8290     CASE >50
8300         Xy_maj=10
8310     CASE >10
8320         Xy_maj=5
8330     END SELECT
8340     RETURN Xy_maj
8350     FNEND
8360 !
8370 !
8380 !
8390 SUB Compute_stat(Tivalu(*),INTEGER Array_size,Res,REAL Stat_min,Stat_max,S
tat_mean,Stat_dev)
8400 !
8410 !Compute min, max, mean, and standard deviation values of Tivalu(*),
trim to (Res) resolution, and pass back.
8420 !
8430     INTEGER I
8440     REAL Std_dev,C
8450     Mean=0
8460     Std_dev=0
8470     A=0
8480     B=0
8490     Stat_min=Tivalu(1)
8500     Stat_max=Tivalu(1)
8510     FOR I=1 TO Array_size
8520     IF Tivalu(I)<Stat_min THEN Stat_min=Tivalu(I)
8530     IF Tivalu(I)>Stat_max THEN Stat_max=Tivalu(I)
8540     A=A+Tivalu(I)
8550     B=B+(Tivalu(I)*Tivalu(I))
8560     NEXT I
8570     Mean=A/Array_size
8580     C=Array_size
8590     Std_dev=SQR(ABS((Array_size*B-A*A)/(C*(C-1))))
8600     Stat_mean=PROUND(Mean*1.E+12,LGT(Res))*1.E-12
8610     Stat_dev=PROUND(Std_dev*1.E+12,0)*1.E-12
8620     SUBEND
8630 !
8640 ! ***** THE END *****

```

Operation

After making 1000 measurements (or whatever sample size has been chosen) in the fast binary mode, the program converts the raw time interval data into real time interval numbers, and plots the samples in the time interval vs. time form. The samples are then sorted, processed for statistics and displayed a second time in histogram form (number of samples vs. time interval value).

The time interval measurements are pulse width, rise time, and fall time. These three measurements are obtained through appropriate and automatic programming of the START and STOP trigger levels on the 5363B probes.

NOTE:

The parameters which may be measured by the system are limited to a minimum value of 10 ns. With modifications, the system will measure and process time intervals below 10 ns. (See page 24 — Program Limits).

Getting Started

- 1) Connect up the equipment as shown in figure 8.
- 2) Power on the 5370B counter and the 5363B probes.
- 3) Calibrate the 5363B probes and verify correct equipment setup.
 - a) 5363B probe START and STOP settings:
A + 0.00
 - b) 5370B counter START and STOP settings:
Trigger Level . . . PRESET
Slope rising edge
Impedance 50 ohm
Atten ÷ 1
Coupling DC
SEP/COM SEP
 - c) Insert both probes into their respective calibration sockets on the front panel of the 5363B. Press the TIME ZERO/LEVEL switch DOWN and verify that the probes calibrate properly (see manual if necessary). Now press the switch up to TIME ZERO and verify a reading between 30 and 70 μ s (very approximate). This shows that the system is operational at the hardware level.
- 4) Now make a test measurement on your signal to verify operation. Change the probe setting to make, for example, a risetime measurement – START 20% peak, STOP 80% peak. Put the A probe on the test point.
- 5) You should now see a reading of the rise time on the counter. If you're not getting anything on the counter, use the trigger indication lights on the counter to localize which channel is not operating. Trigger lights can also be useful in determining the actual peaks of the output waveform.

If the setup is working to this point, then you are ready to load the software into the computer and run the program. Note that UNLESS THE SETUP IS WORKING HERE, THE PROGRAM WILL NOT RUN CORRECTLY, AND/OR MAY GIVE YOU ERRONEOUS RESULTS.

- 6) Power on the computer and load BASIC 2.0 with the 2.1 Extensions. Graph 2 _1 must also be loaded to support the color graphics.
- 7) Load the program from your disc into the computer and press RUN. The program will start up with a brief description and then ask you for 5363B and 5370B addresses. The default addresses are:
5363B . . . 07
5370B . . . 03
- 8) If you are using a plotter, indicate by entering 'y', followed by the plotters address (default is 05). The program is now ready to make measurements.

Explanation of Softkeys

Pulse Width

This key initiates a set of pulse width measurements. The number of measurements made is determined by the sample size you've chosen (default is 1000). (The 5363B probes are addressed to trigger at +2.50v in the sample program).

Rise Time

Same as Pulse Width – (except probes are addressed to trigger at +0.50v (START) and +4.50v (STOP) in the sample program).

Fall Time

Same as Rise Time – (with probes set to +4.50v (START) and +0.50v (STOP) in the sample program).

Time Plot ON/OFF

This key simply enables the time plot (i.e., time intervals vs. elapsed time).

The plot is useful in showing relatively long term trends in the time intervals (or frequency) coming from a clock.

Chg Resolution

Pressing this key allows you to change the resolution of the time and histogram plots. Remember that the 5370B's scheme is limited to 20 ps quantization error, (unless averaging is used), so 10 ps of plot resolution is about the finest to use. 'ENTER' a number, or press 'CONTINUE' or 'ENTER' to default.

Chg # Samples

You may adjust the number of samples from the default value of 1000 using this key. The maximum is set by the size of the buffer array 'Tidata'. This means the program has to be stopped to increase the maximum. 'ENTER' a number, 'min' or 'max', or press 'CONTINUE' or 'ENTER' to default.

DEMO/AUTODEMO

Pressing this key puts the program into the AUTODEMO mode, which will cycle through all three measurement modes (pulse width, rise time, fall time). It requires a resolution and sample size for each mode.

'AUTODEMO' puts the program into continuous mode, and may be exited by pressing the key again.

Single ON/Cont ON

In 'Single', the program makes one set of measurements and pauses after the histogram has been drawn. 'Cont' will continually cycle, doing one measurement set after another without a prompt (whether in DEMO or AUTODEMO).

Ext plot OFF/ON

The status of this key tells the program whether or not to draw a (4 color) plot of the time or histogram plots (which ever one it just finished drawing on the screen) on an external plot device. If you want, for example, a plot of the histogram on a plotter, but do not want the time plot, then press this key at some point after the time plot has been drawn on the screen and before the histogram is finished on the screen. Press the key once – it may take a second or two for the calculator to change the label if it is sorting or filling histogram bins.

Note: If you want a plot of the time intervals vs. time, you must press this key before the time plot is finished on the CRT. This is because the sorting process throws away all timing information.

Quit

This key provides a means of exiting the program.

Miscellaneous

Program limits

Precision time intervals tend to be limited in duration. Because of this the measurement capability of the system has been limited to a maximum of 999ns and a minimum of 7 to 10 ns. This reduces the computation time and program complexity at the expense of user flexibility.

For *longer time intervals* you will have to do major modifications to the data processing subroutines.

Shorter time intervals may be measured with a slight program modification and careful attention to measurement setup. Basically, you must:

- 1) add the 'AR2' command to line #1720 (\pm TI mode),
- 2) make sure that the start pulse arrives at the counter before the stop pulse, and
- 3) *if* you are trying to make measurements of *1ns or below* (eg, rise or fall time measurements), you should use some input device for the counter other than the 5363B probes. This is because the probes have a 350MHz bandwidth limit and may introduce significant errors into the measurement. (See table 1.)

Using a 5370A

A 5370A will work in place of the 'B' model, with certain conditions being met.

- 1) Line #1770 must be included as the binary bytes must be 'synchronized' in the 5370A.
- 2) Line #1810 must be deleted.
- 3) Realize that the 5370A has an older design input amplifier system, which will not give the performance of the newer designed one in the 'B' model, when looking at very short time interval measurements.

Using a 5363A

The 'A' model probes may be used directly in place of the 'B' model with no changes to the program.

Using a Series 200 other than the 9836C

The program was written to utilize the color graphics capabilities of the 9836C. It will run without modification on the 9836A, 9826A or 9816A so long as the memory is large enough to support BASIC 2.0, the BASIC EXTENSIONS 2.1, and about another ¼ megabyte for program, variable and matrix storage.

Increasing the fast binary transfer rate

In its current configuration, the program is set up to transfer readings from the counter to the computer at roughly 700-800/second. This is because the TRANSFER process in the series 200 is interrupted by EOI being asserted, and EOI is asserted by the 5370B at the end of each 5 byte message. Servicing these interrupts slows the transfer. Avoiding the use of the TRANSFER construct, or the assertion of EOI, are the only ways to achieve the maximum data transfer rate.

A data transfer rate of greater than 5000/sec can be obtained by using a computer other than a series 200, by using a language other than BASIC (such as PASCAL, in which you construct your own TRANSFER statement), or by modifying the HP-IB connection to break the EOI line.

The upper ceiling of approximately 6000 readings/sec is set by the need for 165 microseconds dead time between measurements. During this time the counter is reading registers and transferring the data through the HP-IB port to the computer.

Measuring Time Intervals Larger Than 320 Microseconds In Fast Binary

In its normal measurement mode, the 5370B makes time interval measurements using three internal hardware registers; N0, N1 and N2, plus a fourth register in RAM which handles overflow of the N0 register. The microprocessor in the counter updates this fourth register as part of its data processing routine, and includes this in the time interval, frequency or period result on the LED display.

In the fast binary mode, the counter does no processing of the data and, hence, updating of the fourth register. Therefore, it is possible to get erroneous results by overflowing the N0 register. This will happen when you attempt to make time interval measurements larger than 327.68000 microseconds. (Equivalent to $2^{16} \times 5\text{ns}$ (16 bit register)).

You can circumvent this problem if you know the approximate length of the time interval to be measured, within 320 microseconds. The final time interval answer can then be computed as the following:

$$\begin{aligned} \text{TI (ns)} &= ((\text{integer number of times the counter will overflow}) \times \text{overflow value}) + (\text{current count in the counter}) \\ &= ((\text{expected TI, in } \mu\text{s}) / (327.68000\mu\text{s})) * (327680.00\text{ns}) + ((N1N2)/256 + N0) \times 5\text{ns} \end{aligned}$$

Example:

The time interval to be measured is about 5ms (probably within $100\mu\text{s}$);

$$\begin{aligned} \text{TI (ns)} &= (5\text{ms} / 327.68000\mu\text{s}) * (327680.00\text{ns}) + \text{xxxxxx.xxns} \\ &= (15) \times (327680.00\text{ns}) + \text{xxxxxx.xxns} \\ &= 4.91520000 \times 10^{-3} + \text{xxxxxx.xxns}, \end{aligned}$$

(where xxxxxx.xx is the value transferred from the 5370B registers)

*Must be an integer

Conclusion

We have seen that, by virtue of its high single shot resolution and its great measurement speed, a counter has an important role to play in pulse characterization. This is particularly significant in the production test environment. Here, the time required to make measurements, and the pressures for automation in general, are well met by a counter's strengths.

The 5370B was shown to be capable of greater than 5000 measurements per second, and each one of these with 20 picoseconds of resolution. Also illustrated were some useful statistical and graphical presentations of results, which enhance analysis of time phenomena.

There are many applications for such capabilities, but particularly noteworthy are Disc Testing, IC Characterization, IC Tester Calibration and Digital or Data Communications Testing.



For more information, call your local HP Sales Office or nearest Regional Office: **Eastern** (201) 265-5000; **Midwestern** (312) 255-9800; **Western** (213) 970-7500; **Canadian** (416) 678-9430. Ask the operator for instrument sales. Or write Hewlett-Packard, 1501 Page Mill Road, Palo Alto, CA 94304. **In Europe:** Hewlett-Packard S.A., 7, Rue du Bois-du-Lan, P.O. Box, CH-1217 Meyrin 2, Geneva, Switzerland. **In Japan:** Yokogawa-Hewlett-Packard Ltd., 29-21, Takaido-Higashi 3-chome, Suginami-ku, Tokyo 168.

02-5952-7769

PRINTED IN U.S.A.