N6701A-02

Information Only Service Note

Supersedes: NONE

N6701A - Low-Profile Modular Power System

Serial Numbers: Below "MY54002000" (blue/white). "MY54002000/MY99999999" (amber)

The Situation - Blue/white Front Panel LCD Display (below) has been obsoleted.



LCD (blue/white display assembly, p/n 2090-1031) has been discontinued by vendor. Replacement assembly (pictured later) is p/n 5067-6532 (amber in color). Difference in color is unfortunate, but cannot be altered.

ADMINISTRATIVE INFORMATION

| [[]] Calibration Required | PRODUCT LINE: SP |
|---|------------------|
| [X] Calibration NOT Required Calibration NOT Required | AUTHOR: JO'C |

ADDITIONAL INFORMATION:




Solution/Action:

1) New LCD display (5067-6532) is a mechanical & functional "drop-in" replacement for the original.



2) 4-pole dip switch on PPMC PCA must have pole #3 repositioned to "off" as shown below:

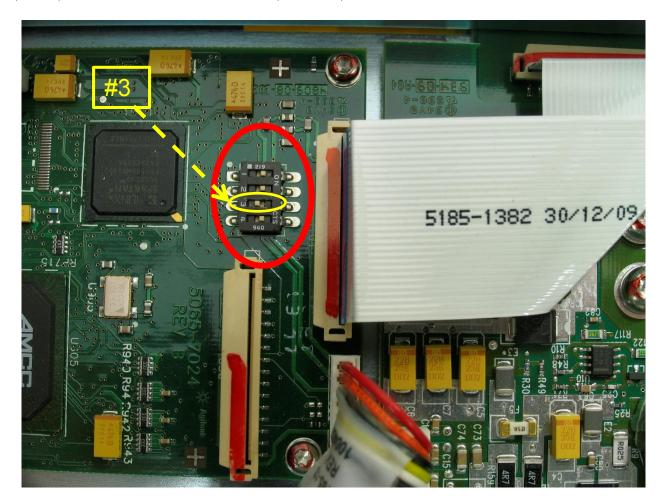

3) Instrument firmware must be version D.04.01 or newer for proper operation of this display.

Revision History:

| Date | Service Note Revision | Author | Reason for Change |
|-------------|-----------------------------|--------|-------------------|
| 25 Nov 2015 | 01 | JO'C | As Published |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |